

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



AU9455132

**(12) PATENT ABSTRACT      (11) Document No. AU-A-55132/94**  
**(19) AUSTRALIAN PATENT OFFICE**

- (54) Title  
STATION FOR CONTROLLING RAILWAY WHEELSETS
- International Patent Classification(s)  
(51)<sup>s</sup> B61K 009/12      G01B 007/00
- (21) Application No. : 55132/94      (22) Application Date : 14.02.94
- (43) Publication Date : 24.08.95
- (71) Applicant(s)  
INVESTIGACION Y ASESORAMIENTO TECNICO, S.A. INVASTESA
- (72) Inventor(s)  
NAME NOT GIVEN
- (74) Attorney or Agent  
DAVIES COLLISON CAVE , GPO Box 3876, SYDNEY NSW 2001
- (57)

A station for controlling railway wheelsets consisting of a equipment the object of which is to measure profile parameters of railway wheels, that is to say, diameters, thickness, height, flange angle and distance between active wheelset faces, for controlling and reporting in a real time the condition or status of de wheelset material under service, and carrying out a statistical survey of all measured parameters with the corresponding evaluation, said station being configurated by a mechanical equipment located on the track itself, an electronic equipment and a computerized insert.

**CLAIM**

1.- A station for controlling railway wheelsets intended for carrying out measurements of the parameters defining the wheel-set profile of each wheels, as well as of the dimensions relating both wheels on each shaft, c h a r a c t e r i z e d in that it is constituted by a series of measuring chains, each of which is composed of gages related to potentiometer feelers, the signal of which is handled and energized in a computer, this computer being fitted of means for analyzing said data, relating them each other, and for defining the turning profile at a maximal improvement for each wheel, all them in an automatic way, the union of this installation being possible to several peripherals, as well as for generating local networks.

2.- A station for controlling railway wheelsets, according to claim 1, c h a r a c t e r i z e d in that it has a mechanical part installed on the track itself, which is formed by a plate which, acting as a guide, supports the mechanisms driving the potentiometric displacement sensors, four or more per track line, corresponding to the wheel diameter, flange thickness, flange height, angle and distance between active faces.

3.- A station for controlling railway wheelsets, according to claim 2, c h a r a c t e r i z e d in that the mechanical part is preferently made of precision mechanized, high quality alloyed steel, superficially protected against aggressive agents, and its dimensioning corresponds to 22 tons per shaft.

Our Ref: 498528

P/00/011  
Regulation 3:2

AUSTRALIA

Patents Act 1990

ORIGINAL  
COMPLETE SPECIFICATION  
STANDARD PATENT

---

Applicant(s):                      Investigacion Y Asesoramiento Tecnico, S.A.  
   Investesa  
   Montalban, 14  
   28014 MADRID  
   SPAIN

Address for Service:              DAVIES COLLISON CAVE  
   Patent & Trade Mark Attorneys  
   Level 10, 10 Barrack Street  
   SYDNEY NSW 2000

Invention Title:                      Station for controlling railway wheelsets

The following statement is a full description of this invention, including the best method of performing it known to me:-

#### BACKGROUND OF THE INVENTION

The present inventions refers to a station for controlling railway wheelsets, the aim of which is to measure parameters of railway wheel profiles, that is to say, diameter, thickness, height, flange angle and distance between active wheelset faces, in order to obtain a control and dispose of a real time information on the condition of wheelset materials incorporated in vehicles under service.

Apart from this, this station for controlling railway wheelsets is capable, through an appropriate connection with a computing service, of carrying out statistical study of all measured parameters with the corresponding evaluation of materials exploitation.

#### FIELD OF THE INVENTION

This invention applies to the railway industry in general.

#### RELATED ART

It is known to use a cadenced manual technique to check the condition of some points on the motive parts, this being an operation effected since a relatively few years.

Obviously, a manual operation assisted by an impact tool exercised on the wheels and a visual inspection of the railway vehicle wheelset surfaces did not fully exclude the existence of multiple anomalies.

Of course, there were some potential anomalies detected by the use and utilization of this technique.

Later on, periodical inspection of same were carried out on railway vehicles in order to determine possible failures existing on the vehicle itself, or in order to detect a possible damage even before it being caused.

These operations incorporated a high labor cost, breakdowns of the inspected material and, of course, added operations for moving the material to workshops and again moving it to be incorporated into an active service.

Fundamentally, the railway vehicles should be inspected at their wheelset elements, and this

operation should be effected in a rigorously periodical way, with a previously stressed character, and once the inspection operation carried out, the firm owning the railway vehicle could relay on an exhaustive detail of the condition of its vehicle, and also  
5 to dispose of a checking or control sheet showing the operations already made or to be made on it in order to have an absolute certainty on the vehicle itself.

According to the above, the modern trains should be subjected to increased rigorous controls in view of the increasing traffic  
10 speeds, and, of course, due to the greater requirements existing at present as regards their safety and comfort.

On the other side, it is also imperative to attain these suitable improvements with a lesser exploitation cost.

An evident solution to this problem would be to relay on a  
15 fully automatic installation, fitted with a great reliability and, at the same time, counting on the possibility of getting a substantial reduction of financial costs, guaranteeing at the same time a reliable control process of wheelsets.

Nevertheless, nothing is known, up to date, on the existence  
20 of any station for controlling railway wheelsets, such as it has been pointed above.

#### SUMMARY OF THE INVENTION

The station for controlling railway wheelsets proposed by the invention constitutes, per se, a solution obviously simplifying  
25 and, simultaneously, potentiating the control of railway wheelsets, and offering also multiple auxiliary applications.

In a more definite way, the station for controlling railway wheelsets proposed here, constitutes an equipment configured as an electronic-mechanical-computerized system, having different  
30 components.

It can be said that the station for controlling railway wheelsets, according to the preceding paragraph, has three definite areas, that is:

- A mechanical part
- 35 - An electronic part

- A computerized part.

A harmonic cooperation of these three units results in the existence of the station for controlling railway wheelsets.

The mechanical part is mounted on the track itself, and it is  
5 composed of a plate that, acting as a guide, supports the mechanisms driving potentiometric displacement sensors, by a fixed number of 4 or more per track line, corresponding to the wheel diameter, flangs thickness, flange height, angle and distance between active faces.

10 Said mechanisms are made of high quality, precision machined alloyed steel, and they are superficially protected against aggressive agents normally found on the tracks, such as:

- Oils
- Water
- 15 - Grease
- and so on.

Their dimensioning corresponds to 22 tons per shaft.

The electronic part is intended for carrying out measurements, and it is composed of eight potentiometric sensors and, of course,  
20 it includes the processing electronics of the signals from the sensors.

For processing these signals, there is provided an electronic unit composed of:

Feeding bridges, of -15V and +5V;

25 Eight units processing and digitizing the signals; they send these signals to a CPU, and each of them disposes of a microprocessor handling each signal according to a specific program.

A CPU to communicate the electronic measurement unit to a CPU.

The computerized part is integrated, in its hardware, by a -  
30 compatible PC and a printer.

Its software, specifically developed for this application, is basically composed of the following parts:

- A communication program of the electronic measurement unit with a PC, watching the link between the CPU of the electronic unit  
35 and the PC.

- A program analysing the obtained wheelset parameters, adapting itself to the requirements of the user. This analysis can be modified according to the theoretical or experimental data as for the wear of the wheelsets and reprofiles brought by the user.

- 5     - Files for taking decisions according the analysis made, being organically configured in relation to the user's requirements, - and they can be continuously loaded.

These files contain the denomination listing of the vehicle, its wheelset profile and its tolerances related between wheels  
10 on a same shaft, between bogie wheels, vehicle wheels and even branch wheels.

According to these files, the system will take decisions to recommend predetermined operations, which can be validated by the user or modified in accordance with particular circumstances  
15 so being cancelled the automatic decision.

The files arranged in the computerized part are designed as a vehicle file, a stencil file and a calibration file, all them being specifically designed for handling a base process.

- 20     - A program applicated to maintenance , that is to say, a program fundamentally foreseen for providing control and information to the Depot Heads or those responsible for the maintenance, and it can be modified according to the requirements of each department.

From the information on the wheelset condition can be obtained  
25 alarms for the wheels, the profile of which is within the limits and is necessary to turn on a lathe, turning programming, removal of material which cannot be turned, etc.

- 30     - A specific application for CNC lathe, intended for realizing, once approved, the turning decision on the PC display, proceeding to transmit to the numerical controls the corresponding turning program, and obtaining, thru a printer, the configuration listing.

The station for controlling railway wheelsets has a scope based on the following points:

- A) Th passing speed of the vehicle will be lesser than 5 km/  
35 hour, but if no measur m nt is required, it can run up to 15 km/h.

B) The wheel parameter sensoring tolerances are as follows:

- wheel diameter +/- 1 mm
- flange height +/- .1 mm
- flange thickness +/- .1 mm
- Qr. +/- .2 mm

5

C) Repetition of measurements:

- wheel diameter +/- .5 mm
- flange height +/- .05 mm
- flange thickness +/- .05 mm
- Qr. +/- .1 mm

10

The system is compatible with the present railway substructure, and it can be installed on any track where the traffic is made at a shunting speed.

Also, the system is compatible with the present electric railway substructure at any line or depot.

15

Lastly, the system is open, which means that it can accept any additional signal preprocessing or obtained result postprocessing, such as:

- vehicle identification systems
- generation of local networks linked to a computer managing several PCs.
- Information transmit via telephone.

20

#### DESCRIPTION OF THE DRAWINGS

In order to supplement the present description and to help to a better understanding the features of the invention, the accompanying drawings, which are a part of the specification, will show, in an illustrative and non limitative way, the following:

25

Figure 1 shows a view of the different elements composing the station for controlling railway wheelsets which thanks to its fully harmonic operation, attain the proposed aim of this invention.

30

Figure 2 shows an elevational side view of the mechanical part or installation.

Figure 3 shows a front elevational detail duly sectioned, viewed by A-B shown jointly with other elements in Fig. 2.

Figure 4 shows a front elevational detail duly sectioned viewed

35

by C-D of the assembly shown in Fig. 2.

Figure 5 shows a front elevational detail, due sectioned view-  
ed by E-F of the assembly shown in Fig. 2.

Figure 6 shows finally the measurement equipment.

5 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

From these figures, it can be seen that the station for con-  
trolling railway wheelsets proposed by the invention, is consti-  
tuted by a mechanical part 1, from which some connections 2, 3,  
4 and 5 emerge, which connect a common communication 6, so ob-  
10 taining, on a side, to communicate with a pneumatic installation  
7 and with a measurement equipment 8, which, in turn, is connec-  
ted to a computer 9 by means of a connection 11, having the re-  
lative keyboard 10 the computer 9, the computer and the keyboard  
being connected each other by means of a connection 11'.

15 Also, the station for controlling railway wheelsets has a  
series of elements 12, 13 and 14, which configure the mechanical  
subsystem from which is effected the measurement of the flange  
thickness, flange height and flange angle, counting on element  
referenced 24 configuring the wheelset band diameter measure-  
20 ment device

The station incorporates a measurement equipment having an in-  
dicator led 15, counting on a voltage adjuster 16, as well as a  
second indicator led 17, also incorporated in a voltage adjuster  
18.

25 Under the reference 19, it is shown the voltage indicator led  
+5V; under the reference 20, the general zero setting pushing;  
under reference 21, the communication link with a PC, while the  
references 22 correspond to connections to sensor, and the refe-  
rence 23 corresponds to connections to the measurement indicator  
30 led.

In syntesis, it can be said that, for performing the railway  
wheel profile, there are several geometric standars which are  
used in a conventional mann r by several railway managements.

N verth less, in all them, it is necessary to k ep a series  
35 of g ometric paramet rs within valu s which are considered fully

necessary for obtaining a traffic safety.

When these parameters are within their tolerance limit, it is necessary to specifically recover the profile.

The measurement, that is to say, the control, is periodically performed in order to check these parameters.

Parameters normally controlled are:

- flange thickness
- flange height
- flange angle
- wheelset band diameter

To obtain the control of these parameters, it has been provided a installation, such as above described, capable of measuring, the vehicle running at a maximum speed of 5 km/h, all and every above-mentioned parameters for all wheels integrating the vehicle or the railway composite.

Flange thickness is the flange size measured 10 mm under the wheelset.

Flange height is the geometric measure from the lower edge of the flange to the wheelset band, measured on a wheel diameter.

Flange angle is the inclination of the active face of flange it self, measured as the distance between the measuring point of the flange thickness on the active face and a point on the active face 2 mm from the lower edge of the flange.

Finally, diameter of the wheelset band is the wheel diameter measured on a parallel plane to the inner face of the wheel and 70 mm from this later.

It is easily deducted that the installation is composed of three subdivisions and an application software.

The subsystems are as follows:

- A) Mechanical
- B) Pneumatic
- C) Electronic

The mechanical subsystem is breakdown, in turn, into two groups:

- 1. Wheels support and guide
- 2. Measurement gages

Both the supporting and guiding of the wheelset is made through a steel plate providing a continuity to the track head.

This support acts as wheelset track, and, in turn, presents two guides, one outer and one inner for centering the shaft, the 5 wheels of which are to be measured.

The inner guide is a countertrack which is displaced from the shaft transversely to track, within the wheelset tolerances and acting on the inner face of wheel.

The outer guide is a 45° ramp, which, acting on the outer face 10 of wheel -wheelset bevel- avoids an excess displacement of shaft, due to the inner centering.

These two centerers are stiffly fastened to the wheelset support by means of bolts.

The measurement gages are stiffly anchored to the wheelset support 15 by means of bolts.

These measurement gages when in rest position do not act on the wheel, so allowing the traffic of vehicles at a shunting - speed that, as above-mentioned, will never exceed 5 km/hour.

Once pneumatically activated, the gages are placed in a condition 20 for measuring.

The gages used are those intended for measuring the thickness, height, flange angle and diameter of the wheelset band.

The thickness gage is composed of a series of mechanical tempered steel feelers contacting the wheelset bands and the inner 25 and outer faces of the flange, and being placed, through horizontal and vertical motions in a plane which is perpendicular to the track axle in the position appropriate for measuring the thickness.

The feelers mechanically act on a potentiometer, which duly - treated signal will give the thickness measure.

30 The height gage is composed of a series of mechanical feelers as well, made of tempered steel contacting the outer face of the wheel, the wheelset band and the lower part of the flange, and being placed through horizontal and vertical motions in a plane which is perpendicular to the track axle in an appropriate position 35 to measure the flange height.

The mechanical feelers act on a potentiometer which duly treated signal will give the height of the flange measured.

The flange angle gage is also composed of a series of mechanical feelers, made of tempered steel as well, acting in contact with the outer face of the wheel, the inner face and the lower part of the flange, being located, through horizontal and vertical motions, at a plane which is perpendicular to the track axle in the appropriate position to measure the flange angle.

The linear feelers act on a potentiometer which duly treated signal will give the flange angle measurement.

Lastly, the wheelset band diameter gage is composed of a steel fork with hard metal contacts which, in contact with the lower part of the flange, define a chord on a circle contained in a plane which is parallel to the wheelset band and passing over the lower part of the flange.

A feeler centered with the contacts measures the axle corresponding to that chord.

The system is basically in the wheel running sense to keep in touch three measurement points with the wheel as long as possible.

The axle measurement entails in a potentiometer displacement which signal, duly treated, will give the wheelset band diameter.

According to the above-mentioned statement, it is clear that both the thickness gage and height gage form a direct measurement, while the flange angle gage and the wheelset diameter gage form indirect measurements.

The pneumatic subsystem configures as follows:

All the deactivated gages do not carry out any measure on the wheels and allow the vehicles to run over the installation at a shunting speed.

The gage activation consists in elevating these so that, on passing the wheel, they contact the feelers.

This is obtained thanks to pneumatic cylinders with a 6 kg/cm<sup>2</sup> pressure, sliding vertically the gages.

Each gage has two pneumatic cylinders.

The station has a flexible pneumatic piping with distributors

carrying the compressed air from the pneumatic station to the cylinders.

The pneumatic station is composed of a main compressed air intake, a reducer lowering the compressed air pressure from the real position to 6 kg/cm<sup>2</sup>, a pressure gauge, and an electrovalve allowing the air to pass to the cylinders, and commanded, at operator's will, from the control station of the system, or automatically upon passing a vehicle.

All these devices are housed in a watertight protecting metal closet.

Finally, the electronic subsystem is formed by the so-called measure unit.

The measure unit is composed of an electric control for the pneumatic system and a connection to the mains of the whole system.

The installation counts on the use of electronic cards, which dispose of the following units:

- Signal collecting and digitizing unit.
- Control and communication unit with a PC.
- Control and feeding unit for the electrovalves.
- Analogic measuring cards.
- Feeding sources.
- Process control unit.

The signal collecting and digitizing unit performs the corresponding sensor polarization and receives a signal from said sensor, the amplitude of this signal being proportional to the wheel parameter amplitude to be measured.

The sensor polarization is 10 volts, and it is dependent for each sensor.

In the margin of the amplitude of the signal provided by the sensor, it can, therefore, oscillate between 0 and 10 volts.

The digitized information of the signal is transferred to the control and communication unit.

Each collecting unit occupies a Eurocard type card connectable to a standard bus on its upper side.

On the front side of the card, the connection to the sensor plus a luminous informative device are found.

The feeding of each of the collecting units, as well as the information transfer with the control unit, is performed through the back bus.

The luminiscent diode or luminous indicator has the function of remaining normally on, blinking slightly when a new measure is produced.

The diode does not light up if the card is not in a condition of carrying out a measure or if there is a general fault in the circuit.

Finally, the signal collecting and digitizing unit has an appropriate adjustment for positioning the sensor in a rest condition. It is a sliding potentiometer fed with 10 volts, having 10V voltage between ends and a tolerance similar to 0.1 per cent, while the voltage between cursor and mass is 1.5 volts, and its tolerance is constituted with a maximum 10 per cent.

The control and communication unit with a PC performs the following functions:

It carries out a communication with the collecting units, performing the communication via parallel through the bus card.

In this case, the digitized value of the signal given by the sensor is direct transferred, this value can vary between 0 and 3 FFH.

Moreover, each collecting unit energizes a flag before a measure, which is read periodically by the CPU.

Communications with a central computer are performed from the information given by different collection units, being transmitted to a PC by means of the SDT protocol via series.

The units feeding and controlling the electrovalves consist of a +5V FA3 source, a +12V FA2 source, a -12V FA1 source, electrovalve feeding and back panel.

Also, the equipment has a main switch feeding the following devices:

- Measuring unit

- Personal computer
- Printer
- Electrovalves

Each analogic measurement cards incorporates 32 Kbyte data memory, and 8 Kbyte program memory, as well a inlet analogic signal treatment step into the microcontroller.

The microcontroller includes the function of analog-digital converter.

It is about, consequently, measuring in a dynamic way, a series of wheel parameters by means of fully mechanical devices and sensors, constituted as linear potentiometers, which are isolated on the track.

The impulse-shaped signal, which is proportional to the parameter to be measured, is introduced through the front connector on the card, and the first analogic step is produced.

After a filtering and amplification process, the signal arrives at a analog-digital converter, and through a measuring algorithm the maximum value of the signal is detected.

This capture is performed with a 10-bit resolution.

After, this information is transferred to the CPU-T.

The front LED diode shows the status of the card:

- ON indicates waiting condition
- BLINKING indicates measure moment.

Each number is assigned a wheel parameter, and the position of each of the cards in the frame is indifferent.

The station has three feeding sources, two of them of -12V, which have a rectification and filtering step, in addition to a linear voltage regulator.

The outlet voltage is -12V, although it is possible a fine fit by means of a potentiometer located at the front side of the card.

Both sources are fed at 18V AC and can provide an outlet current of 1.5 amperes at 12V.

This voltage stems from a transformer located at the back panel of the equipment.

Since the 18V voltage is floating, it is possible to obtain, through two identical feeding sources, outlet voltages on the order of +12V and -12V.

+12V, -12V voltages are necessary in the 100M measuring unit  
5 equipment for feeding the analog steps.

Said steps have, in general, a low consumption and they perform so sensitive tasks as to handle analog signals, sensor impulse amplification, analog-digital conversion, and so on.

The analog step feeding must perform a series of requirements  
10 for a correct and accurate operation of same:

- Feeding voltage with low curly level.
- Possibility of a separation of masses (digital, analog).
- Quick responses at temporary consumptions.

The third feeding source is a feeding source with 5VDC 4A  
15 outlet.

In fact, it is a regulating step of the 5V source, since the transformer, rectifier and filter condenser are housed in the back panel.

This source receives a 35V direct voltage and reduces them  
20 to 5V by means of a switched circuit.

The whole switching electronics is integrated in a module which allows to obtain 85 per cent performance and a low thermic dissipation.

The front LED diode shows the presence of 5V outlet voltage.

25 This equipment requires a 5V for feeding all the digital circuits, both in analog cards and center CPU.

These digital elements are: microprocessors, memory, inlet/outlet buffer, etc., bearing in mind that, in the equipment, 9 microprocessors operate simultaneously with their respective  
30 data memory and program, and the common feeding source should have characteristics such as:

- Overdimensioned nominal outlet power.
- Low loss index, that is to say, a high performance.
- Possible separation of masses (analog/digital).

35 A high performance, both electric and thermic, is obtained

by using the switched source system.

The mass separation is possible thanks to the use of an independent transformer for that source.

Lastly, the station disposes of a process control unit incorporating the microcontroller, a RAM memory, a program memory, inlet/outlet circuits, and, also, a serial communication channel.

Its task is to perform a control function of each of the analog measuring channels, collecting and centralizing the obtained measures and sending them later to a PC.

10 The data transfer between analog channels and CPU-T is performed via parallel through a bus located at the rear backplane .

The serial communication with the PC is performed according to standard RS232 through the connector located at the front side  
15 of the card.

The operating mode is, basically, as follows:

The central CPU checks sequentially the status of the analog channels, and if a card has performed some valid measurement, then, a validation signal is activated which is identified by the  
20 CPU-T.

Once the data referring to a measure have been obtained, the process of the analog channels is energized again.

This process is cyclic and ends upon arriving at the number of shafts programmed by the PC.

25 The CPU-T identifies each of the analog cards by a number from 0 to 7, preestablished.

It is not considered necessary to extend more this description for an expert in the art to understand the scope of the invention and the advantages derived from it.

30 The materials, shape, size and arrangement of the elements will be open to variation, provided that it does not imply any alteration to the essence of the invention.

The terms under which this specification has been described should be taken in an ample and non limitative sense.

The Claims defining the invention are as follows:

1.- A station for controlling railway wheelsets intended for carrying out measurements of the parameters defining the wheel-set profile of each wheels, as well as of the dimensions relating both wheels on each shaft, characterized in that it is constituted by a series of measuring chains, each of which is composed of gages related to potentiometer feelers, the signal of which is handled and energized in a computer, this computer being fitted of means for analyzing said data, relating them each other, and for defining the turning profile at a maximal improvement for each wheel, all them in an automatic way, the union of this installation being possible to several peripherals, as well as for generating local networks.

2.- A station for controlling railway wheelsets, according to claim 1, characterized in that it has a mechanical part installed on the track itself, which is formed by a plate which, acting as a guide, supports the mechanisms driving the potentiometric displacement sensors, four or more per track line, corresponding to the wheel diameter, flange thickness, flange height, angle and distance between active faces.

3.- A station for controlling railway wheelsets, according to claim 2, characterized in that the mechanical part is preferently made of precision mechanized, high quality alloyed steel, superficially protected against aggressive agents, and its dimensioning corresponds to 22 tons per shaft.

4.- A station for controlling railway wheelsets, according to claim 1, characterized in that it has an electronic measuring part, consisting of 8 or more potentiometric sensors and the processing electronics of the signals from said sensors. For processing these signals, an electronic unit composed of -15V and +5V feeding sources and eight digitizing and signal processing units of same sending these signals to a CPU, are used.

5.- A station for controlling railway wheelsets, according to claim 4, characterized in that each of the processing units has a micro processor handling each signal in accordance

ce with a specific program, and the CPU unit communicates the electronic measuring unit by a PC.

6.- A station for controlling railway wheelsets, according to claim 2, characterized in that the support and guide of the wheelsets is performed through a steel plate which is a continuity of the track head acting this wheelset track, and, at the same time, has two guides, one outer and one inner, for centering the shaft carrying the wheels to be measured, the inner guide being a countertrack which displaces the shaft transversely to the track within the wheelset tolerance and acting on the inner face of the wheel.

7.- A station for controlling railway wheelsets, according to claim 6, characterized in that the outer guide is a 45° ramp, which, acting on the outer face of the wheel -wheelset bevel-, avoids an excess displacement of shaft, due to the inner centering, these two centerers being stiffly fastened to the wheelset support by means of bolts, and the measuring gages being stiffly anchored to the wheelset support by means of bolts, the gages in a rest position do not acting on the wheel, and allowing the traffic of vehicles at a shunting speed, and once activated, the gages are pneumatically in a condition for measuring.

8.- A station for controlling railway wheelsets, according to claim 2, characterized in that the thickness-, height, flange angle- and wheelset band diameter gages are integrated by a series of mechanical feelers made of tempered steel contacting the are for which they are previously determined, acting on a potentiometer which signal, duly treated, will give the measure for the thickness, flange, angle or diameter of the wheelset band.

9.- A station for controlling railway wheelsets, according to claim 2, characterized in that the gage activation is effected through the elevation of same on the wheel passing in order to contact with the feelers, acting on the basis of pneumatic cylinders which vertically slide the gages by steel guide ways and linear ball bearings, each gage being fitted with two

pneumatic cylinders and there being a flexible pneumatic piping with distributors carrying compressed air to the cylinders.

10.- A station for controlling railway wheelsets, according to claim 9, characterized in that it disposes of a  
5 pneumatic station constituted by a main intake of compressed air, a reductor lowering the compressed air pressure from the real position to  $6 \text{ kg/cm}^2$ , a pressure gauge, and an electrovalve providing a passage to the cylinders and commanded from the control unit of the system at the operator's will or automatically when  
10 a vehicle is passing, all these devices being housed in a metal watertight protecting closet.

11.- A station for controlling railway wheelsets, according to claim 1, characterized in that the electronic system disposes of a signal collecting and digitizing unit, a control and communication unit with a PC, several electrovalve feeding and controlling units, analog measuring cards, three feed  
15 source and a process control unit.

12. A station for controlling railway wheelsets substantially as hereinbefore described with reference to the drawings.

DATED this 14th day of February 1994,

INVESTIGACION Y  
ASESORAMIENTO TECNICO,  
S.A. INVASTESA  
By Its Patent Attorney  
DAVIES COLLISON CAVE

# A B S T R A C T

A station for controlling railway wheelsets consisting of a equipment the object of which is to measure profile parameters of railway wheels, that is to say, diameters, thickness, height, flange angle and distance between active wheelset faces, for controlling and reporting in a real time the condition or status of de wheelset material under service, and carrying out a statistical survey of all measured parameters with the corresponding evaluation, said station being configurated by a mechanical equipment located on the track itself, an electronic equipment and a computerized insert.

1/4

55132/94

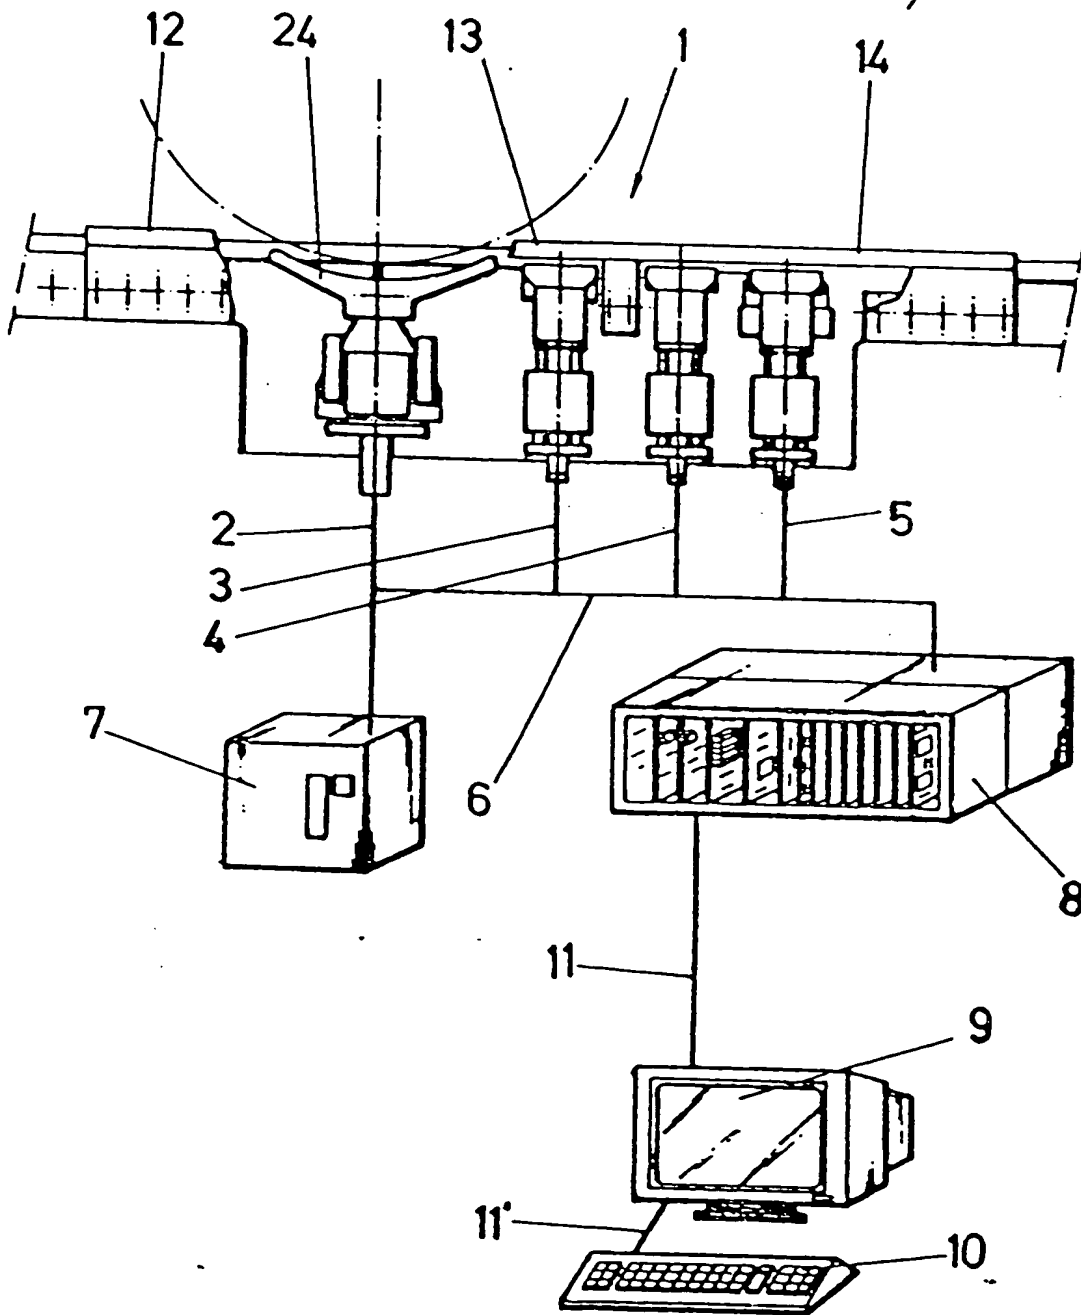


FIG.-1

55132/94

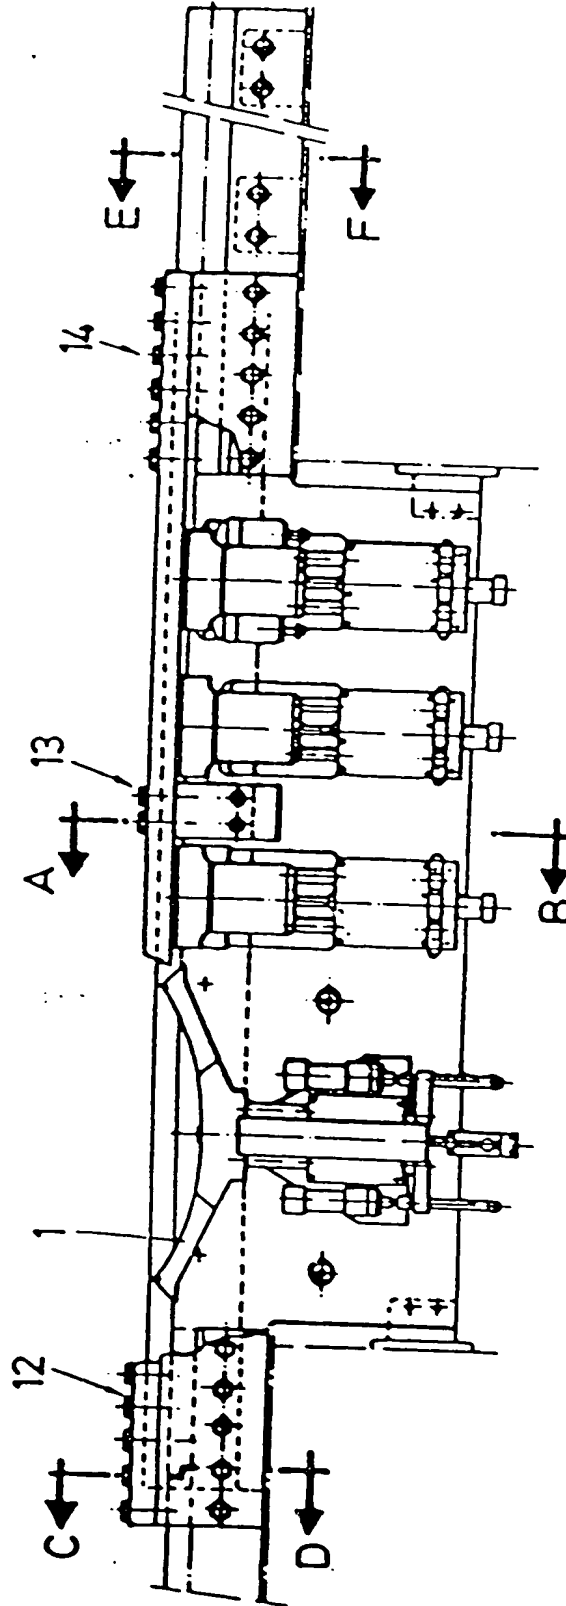


FIG.-2

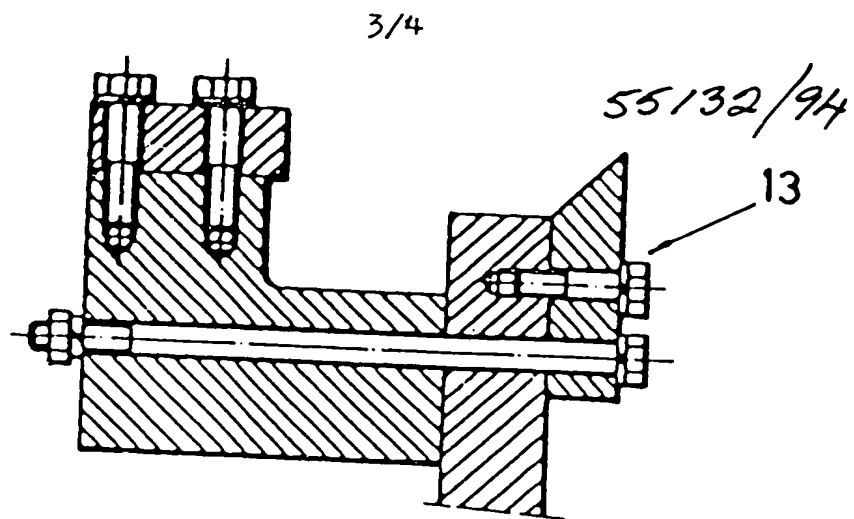


FIG.-3  
A-B

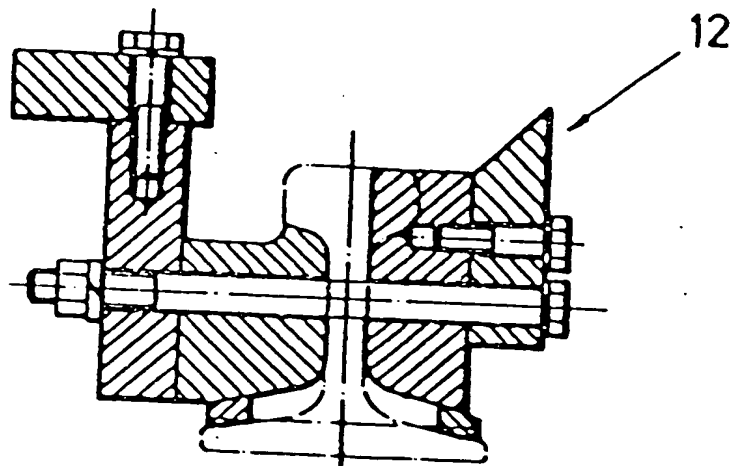


FIG.-4  
C-D

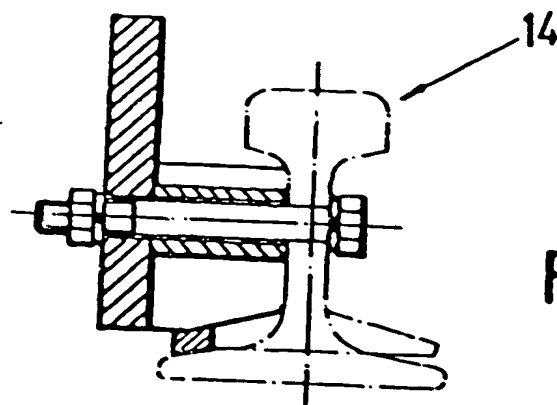


FIG.-5  
E-F

